



AWE-5AC-20

Outdoor Wireless Device

DATASHEET

500+ Mbps


Incredible performance

500+ Mbps throughput - a result of powerful hardware platform with 802.11ac technology based radio and a proprietary data transmission protocol (iPoll). Incorporating a QCA 9563 CPU (750 MHz), a QCA 9882 radio and 64 MBytes of RAM and 16 MBytes of flash memory, the Airway series devices are an ideal solution for capacity demanding applications. State of the art RF design with great output power and sensitivity parameters improve range and capacity over highest the modulation - 256 QAM. The 24V Gigabit Ethernet port (passive PoE) allows utilizing the full capacity of the radio when used in a point-to-point or point-to-multipoint network design. Airway series devices are backwards compatible with TBX5000 devices using iPoll mode, which helps to expand or upgrade existing networks using the latest technologies over time.



New form factor

The shape of the enclosure is now smaller, lighter but retains the IP-66 weather protection rating. Smaller packaging reduces freight costs and makes them less obvious. The new design has no metal parts, which makes them lighter and corrosion resistant.



New mounting

The adjustable mounting bracket is very easy to assemble and install. It consists of two easy to connect parts that allow tilting the device up and down when installing on a pole. A metal strap is included to securely tighten the device. This design includes additional reinforcements and thicker materials to ensure survival in extreme climate conditions.

Distance Recommendation	PTMP Mode	PTP Mode
AWE-5AC-20	5 km	7 km

Wireless

WLAN Standard	IEEE 802.11 a/n/ac, iPoll
Radio Mode	ipoll MIMO 2x2
Radio Frequency Band	5 GHz : 5.150 - 5.850 GHz (FCC 5.150 - 5.250 和 5.725 - 5.850 GHz)
Transmit Power	Up to 30 dBm (Country dependent)
Receive Sensitivity	-97 ~ -75 dBm (Modulation dependent)
Channel Size	5,10, 20, 40 MHz
Modulation Schemes	802.11 a/n: OFDM (64-QAM, 16-QAM, QPSK, BPSK) 802.11 ac: OFDM (256-QAM, 64-QAM, 16-QAM, QPSK, BPSK)
Data Rates	802.11 ac @ 40 MHz: 400, 360, 300, 270, 240, 180, 120, 90, 60, 30 Mbps 802.11 ac @ 80 MHz: 866, 780, 650, 585, 520, 390, 260, 195, 130, 65 Mbps
Error Correction	FEC, LDPC
Duplexing Scheme	Time Division Duplex

6040MHz	Modulation, Mbps	400	360	300	270	240	180	120	90	60	30
	TX Power, dBm	26	27	28	29	30	30	30	30	30	30
	Receive Sensitivity, dBm	-70	-72	-76	-78	-80	-84	-87	-92	-94	-95
-9580MHz	Modulation, Mbps	866	780	650	585	520	390	260	195	130	65
	TX Power, dBm	24	25	25	26	27	28	28	29	29	29
	Receive Sensitivity, dBm	-64	-66	-70	-72	-74	-78	-81	-85	-88	-90

Antenna

Type	Integrated Dual-Polarized Directional Panel Antenna
Gain	20 dBi

Wired

Interface	10/100/1000 Base-T, RJ45
-----------	--------------------------

Physical

Dimensions	216mm (8.5 "), 184mm (7.2 "), 80mm (3.1 ")
Weight	413g (0.91lb)
Mounting	Pole mounting bracket included

Power

Power Supply	24 VDC passive PoE (AC to 24 VDC adapter is included in the package)
Power Source	100 – 240V AC
Max Power Consumption	10 W

Environmental

Operating temperature	-40°C (-40°F) ~ +65°C (+149°F)
Humidity	0 ~ 90 % (Non-Condensing)


Management

System Monitoring	SNMP, Syslog, Web UI, WNMS
Configuration	WebUI, WNMS

Regulatory

Certification	FCC/IC/CE
---------------	-----------

Antenna specifications

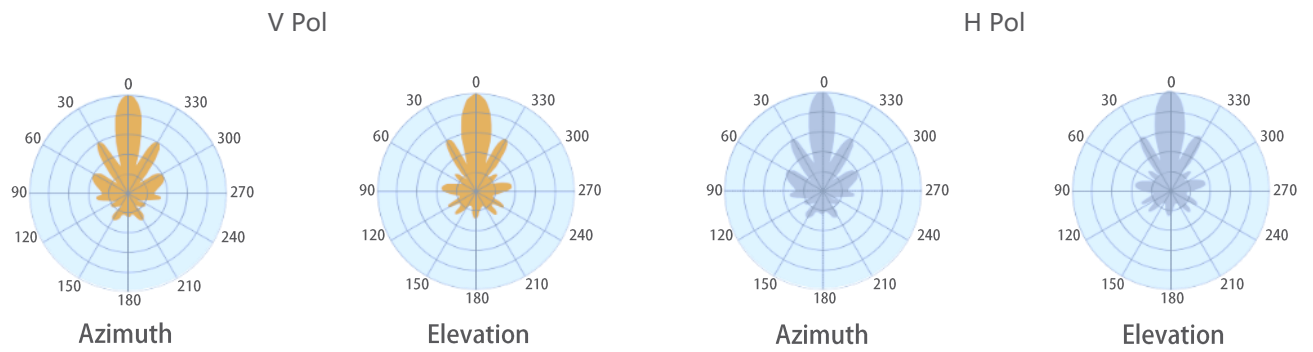

Internal Antenna

Frequency range	5.1- 5.9 GHz
Gain	20 dBi
Polarization	Dual linear
Cross-pol Isolation	27 dBi
VSWR	<1.8
Azimuth beamwidth (H pol)	10 °
Azimuth beamwidth (V pol)	10 °
Elevation beamwidth	10 °